



**STALMARK**

# BUFFER TANKS

TYPE S  
TYPE W

CATALOGUE  
2022



## HANGING BUFFER TANKS



W-type buffer tanks are ideal for small domestic central heating installations. They are made of certified 3 mm steel and are characterized by high energy efficiency. They are designed to cooperate with central heating boilers or heat pumps, enabling effective management of the produced energy. These tanks have compact dimensions and a convenient wall mounting system.



### Technical Data

Parameter	unit	W 60	W 100
Capacity	l	61	102
Max. operating temperature	°C	90	90
Min. operating temperature	°C	6	6
Max. working pressure	bar	3	3
Heat loss	W	39	48
Energy efficiency class	-	B	B
Weight	kg	40	54
Insulation material	-	PUR foam	

# HANGING BUFFER TANKS

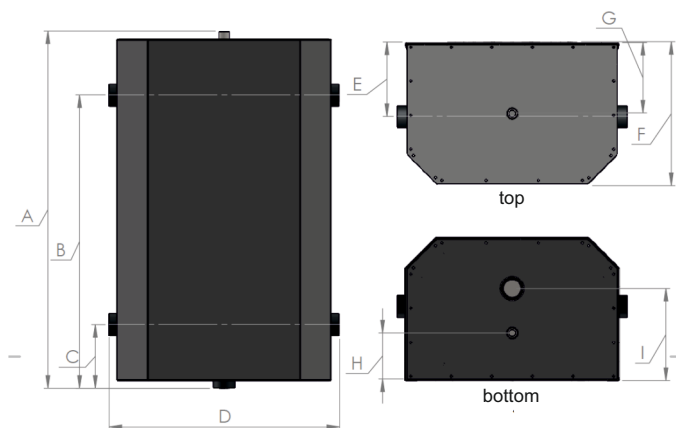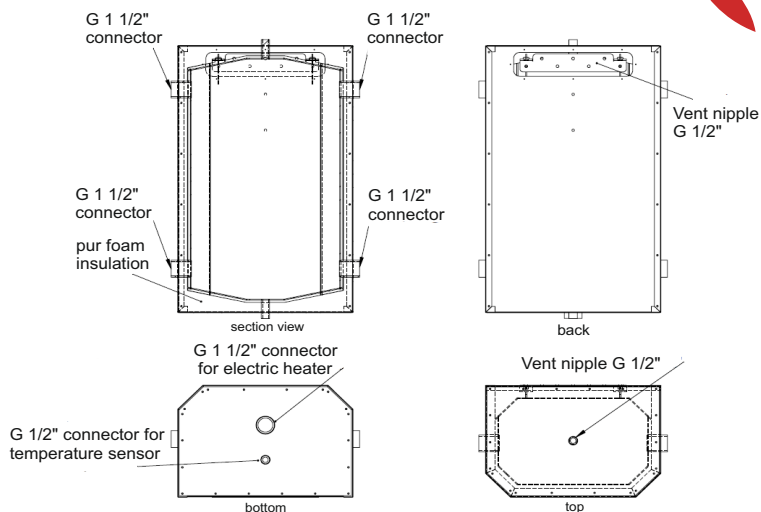

## Dimensions

Dimension	A	B	C	D	E	F	G	H	I
Type	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
<b>W 60</b>	759	604	154	526	190	355	180	126	242
<b>W 100</b>	933	766	166	602	195	375	186	126	242



## STANDING BUFFER TANKS

Larger type S buffer tanks are made of high-grade 4 mm steel. The most modern insulating material - polyurethane foam - has been used to insulate the device. Standing buffers are designed for use in central heating installations, medium and large sizes. Their use guarantees stable and trouble-free operation of the heat source for many years.

### Technical Data



Parameter	unit	S 200	S 300	S 500	S 1000
Capacity	l	200	296	505	960
Max. operating temperature	°C	90	90	90	90
Min. operating temperature	°C	6	6	6	6
Max. working pressure	bar	3	3	3	3
Heat loss	W	75	89	114	122
Energy efficiency class	-	C	C	C	C
Weight	kg	140	160	205	320
Insulation material	-	PUR foam			







# STANDING BUFFER TANKS

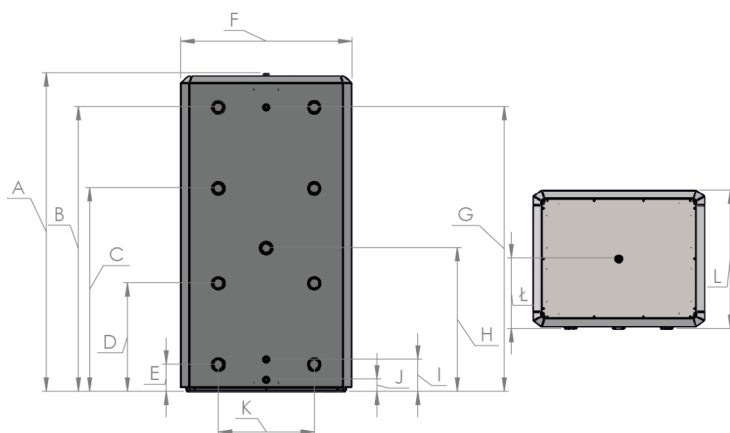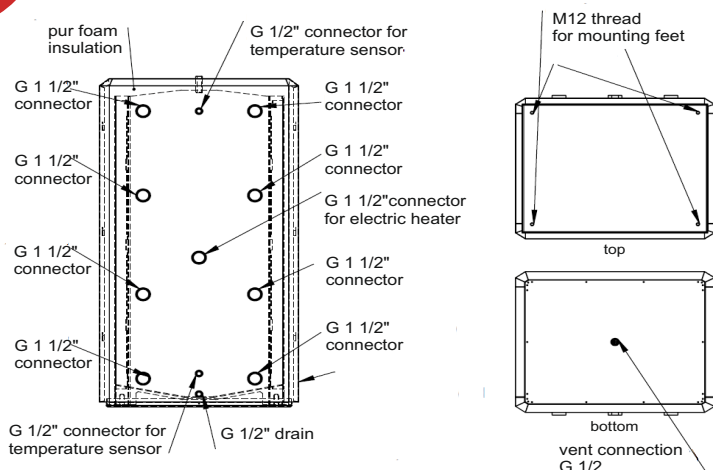

## Dimensions

Dimension	A	B	C	D	E	F	G	H	I	J	K	L	l
Type	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
<b>S 200</b>	1169	1003	753	384	134	684	1003	508	158	61	318	532	273
<b>S 300</b>	1269	1103	833	404	134	784	1103	608	158	61	418	582	323
<b>S 500</b>	1569	1403	1003	534	134	834	1403	708	158	61	468	682	348
<b>S 1000</b>	1958	1776	1276	638	138	1082	1776	1182	158	61	644	767	389



**STALMARK**

Ul. Przemysłowa 21,  
34-120 Andrychów  
NIP 551 262 94 42

---


phone +48 33 476 13 26

---

---

biuro@stalmark.pl

---








# STALMARK

PRODUCENT KOTŁÓW C.O.

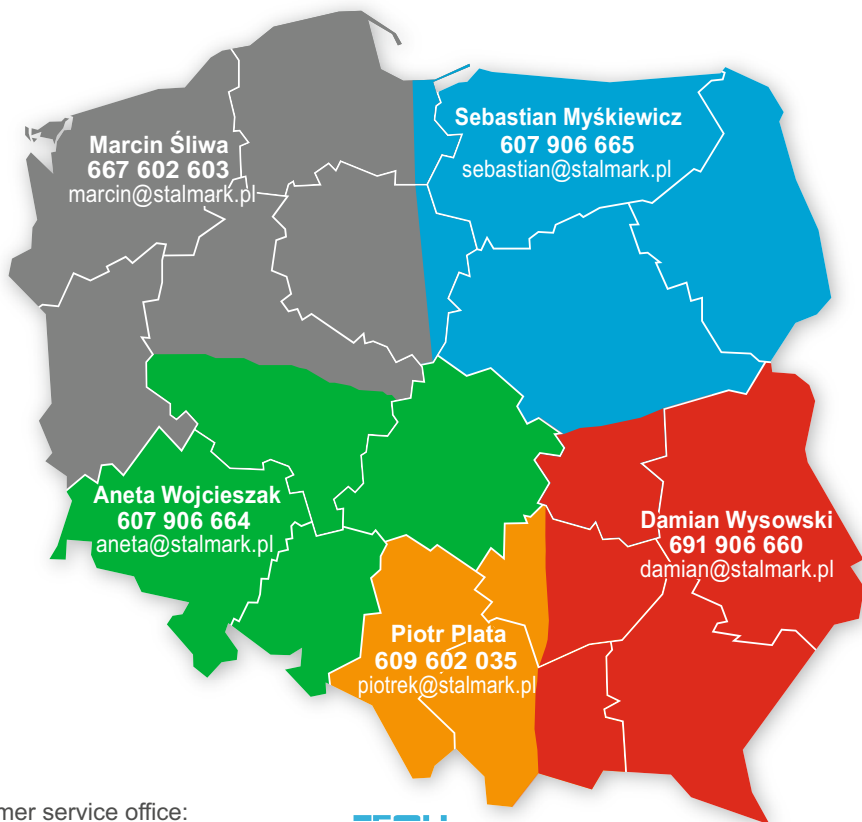

Customer service office:

☎ 33 476 13 26

@ biuro@stalmark.pl

SERVICE hotline:

Mon - Fri at 7.00 AM - 6.00 PM

☎ 33 476 13 26 ext.2

@ serwis@stalmark.pl

**TECH**  
STEROWNIKI

SERVICE hotline:

☎ 33 432 27 50

@ serwis@techsterowniki.pl

contact EXPORT:

@ export@stalmark.pl



The STALMARK company reserves the right to introduce changes in technical parameters, equipment and specifications offered goods. The information contained in this leaflet does not constitute an assurance within the meaning of Art. 4 sec. 3 and 4 of the Act of July 27, 2002 on special conditions of consumer sales and amendments to the Civil Code, and do not constitute a description of the goods within the meaning of Art. 4 sec. 2 of the Act. This catalog does not constitute an offer within the meaning of art. 66 of the Civil Code

The actual appearance of the products may differ from those shown in the picture.

STALMARK sp. z o.o. sp. k.  
ul. Przemysłowa 21, 34-120 Andrychów  
phone + 48 33 476 13 26, biuro@stalmark.pl

STALMARK.PL

Katalog ver. 1/2022